

ANA 12 - 24 V

22047


oktaplex motion



DE - Montageanleitung
FR - Instructions de montage
ES - Instrucciones de montaje
IT - Istruzioni per il montaggio

NL - Montage-instructies
SE - Monteringsanvisningar
CZ - Návod k montáži
SK - Návod na montáž

RO - Instrucțiuni de montaj
PL - Instrukcje montażu
GB - Mounting instructions
PT - Instruções de montagem

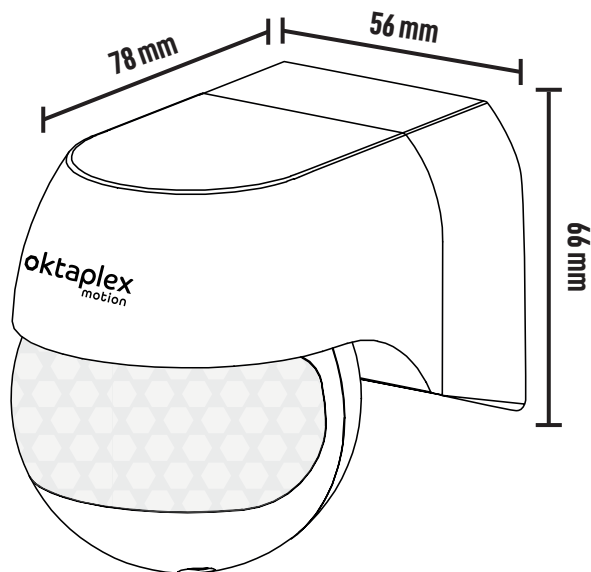

 WhatsApp



ANA

12 - 24 V

Infrarot Bewegungsmelder für Innen und Außen / Détecteur de mouvement infrarouge pour l'intérieur et l'extérieur/ Detector de movimiento por infrarrojos para interiores y exteriores / Rilevatore di movimento a infrarossi per interni ed esterni/ Infrarood bewegingsmelder voor binnen en buiten / Infraröd rörelsedetektor för inomhus och utomhus / Infracervený detektor pohybu pro interiér i exteriér / Infracervený detektor pohybu pre interiér a exteriér / Detector de mișcare în infraroșu pentru interior i exterior/ Czujnik ruchu na podczerwień do użytku wewnątrz i na zewnątrz budynków / Infrared motion detector for indoors and outdoors / Detetor de movimentos por infravermelhos para interiores e exteriores

Nennspannung / Tension nominale / Tensión nominal / Tensione nominale / Nominaal voltage / Märkspänning / Jmenovitě napětí / Menovitě napätie / Tensiunea nominală / Napięcie nominalne / rated voltage / tensão nominal

AC / DC 12 - 24 V
50-60 Hz

Nennleistung / Puissance nominale / Potencia nominal / Potenza nominale / Nominaal vermogen / Märkeffekt / Jmenovitě výkon / Menovitě výkon / Putere nominală / Moc znamionowa / rated power / potência nominal

0,5 W

Maximale Schaltlast / Charge maximale commutable / Carga máxima de conmutación / Carico massimo commutabile / Maximale schakelbelasting / Maximal kopplingsbelastning / Maximální spínací zátěž / Maximálne spínacie zaťaženie / Sarcina maximă de comutare / Maksymalne obciążenie przełączające / Maximum switching load / Carga máxima de comutação

60 W (12 V)

120 W (24 V)

Minimale Schaltlast / Charge de commutation minimale / Carga de conmutación mínima / Carico minimo di commutazione / Minimale schakelbelasting / Minimal kopplingsbelastning / Minimální spínací zátěž / Minimálne spínacie zaťaženie / Sarcina minimă de comutare / Minimalne obciążenie przełączające / Minimum switching load / Carga mínima de comutação

2 W

Maximaler Nennstrom / Courant nominal maximal / Corriente nominal máxima / Corrente nominale massima / Maximale nominale stroom / Maximal nominell ström / Maximální jmenovitý proud / Maximálny menovitý prúd / Curent nominal maxim / Maksymalny prąd znamionowy / Maximum rated current / Corrente nominal máxima

max. 5A

Schutzklasse / Indice de protection / Clase de protección / Classe di protezione/ Beschermingsklasse / Skyddsklass / Trída ochrany / Trieda ochrany / Clasa de protecție / Klasa ochrony / Protection class / Classe de proteção

II

Schutzart / Indice de protection IP / grado de protección / Livello di protezione IP / IP mate van bescherming / IP-klass / Stupeň ochrany / Stupeň IP ochrany / Clasa de protecție IP / Klasa ochrony IP / Protection class / Classe de proteção

IP44

Umgebungstemperatur / Température ambiante / Temperatura ambiente / Temperatura ambiente / Omgevingstemperatuur / Omgivningstemperatur / Okolní teplota / Okolná teplota / Temperatura ambientă / Temperatura otoczenia/ Ambient temperature / Temperatura ambiente


-20°C - +40°C

The diagram illustrates the connection between the OKTAplex motion camera and the OKTAplex motion sensor. The camera is connected to a multi-pin connector, which is then connected to a sensor unit. The sensor unit has a 40 mm dimension and a 6 mm dimension.


A diagram showing a cross-section of a pipe with a diameter of 20 mm. Two rods, each with a diameter of 7 mm, are inserted into the pipe. The rods are positioned such that they touch each other and the inner wall of the pipe. The distance between the centers of the two rods is indicated as 7 mm.

INSTALLATION/SETTINGS


4

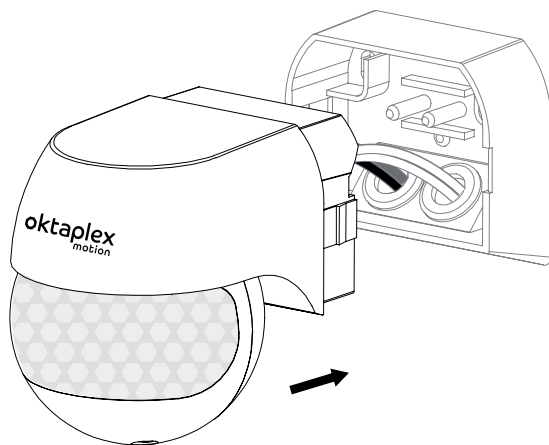

5




i

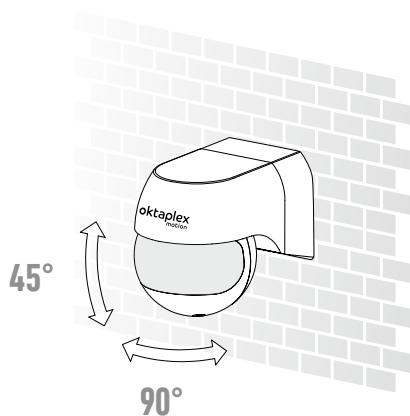


INSTALLATION

i **max. Load**
60 W (12 V)
120 W (24 V)


Option 1

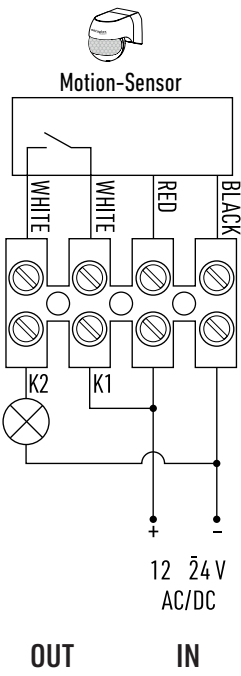




Option 2

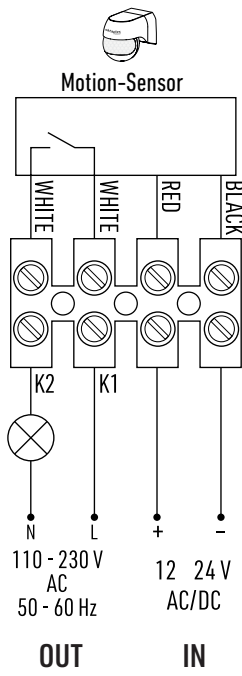

Option 3

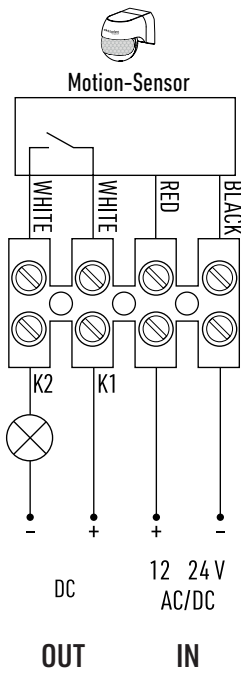

SETTINGS

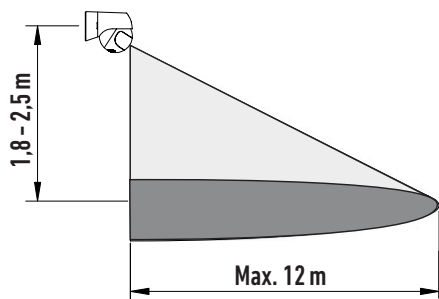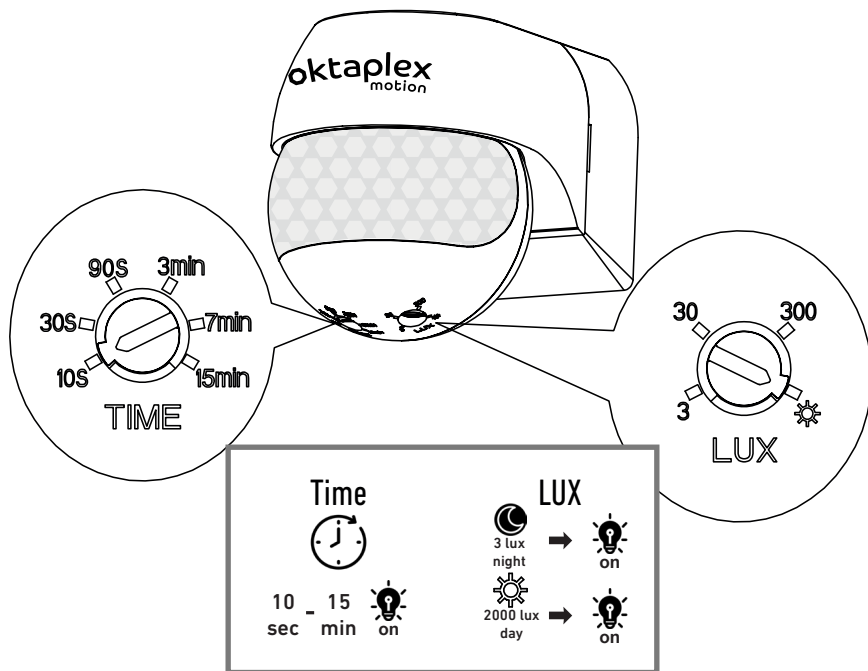



ETAPLEX GmbH · Höherweg 245 · 40231 Düsseldorf · Germany
+49 211 9726 4070 · info@etaplex.de · oktaplex.de